



Introducing the EL 800 all electric mini articulated front end loader. This is smallest model in our lineup, but don't let its size fool you. This machine has a quick hitch for changing attachments without leaving the cab, easy to use joystick for various functions, and a read hitch for pulling loads or accessories. Designed for precision, efficiency, and sustainability, the EL 800 is a testament to the power of compact electric machinery. With an 8' turning radius the machine is perfect for tight spaces and indoor projects. This mini electric wheel loader combines eco-friendly operation with the muscle needed to tackle a variety of tasks. Its compact dimensions and zero emissions make it ideal for landscaping, small construction projects, and agricultural tasks where maneuverability and environmental responsibility are key. Experience the future of compact loading with the EL 800, where size meets power.

The Compact Powerhouse



USD \$11,850.*

CAD \$16,800.*

*Leading the
Charge in Electric
Sustainability!*

- ARTICULATING BOOM**
- INSTANT TORQUE**
- ZERO EMISSIONS**
- INDOOR USE**
- LESS MAINTENANCE**
- ECO-FRIENDLY**




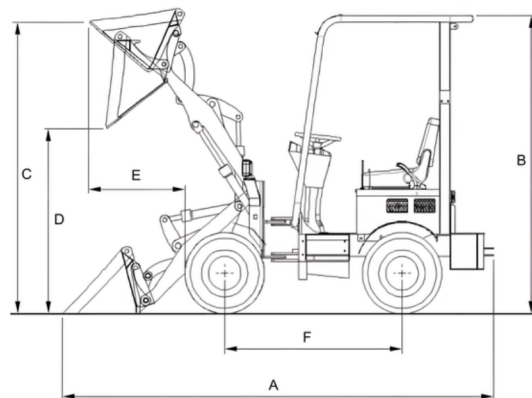
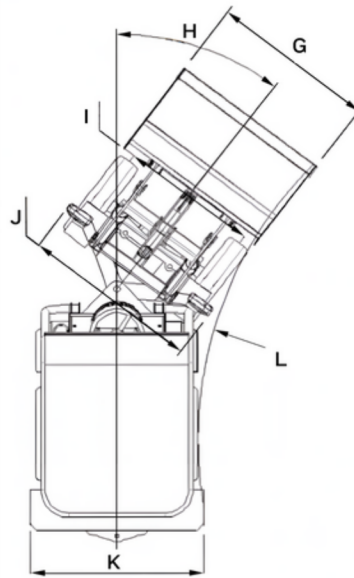
**QUIET POWER,
BIG RESULTS!**



**FEATUES
&
ATTACHEMENTS**



		MODEL EL 880	
		US Standard	Metric
DIMENSION	TOTAL WEIGHT	2469 lbs	1120 kg
	RATED LOAD	882 lbs	400 kg
	BUCKET CAPACITY	.26 yd ³	0.2 m ³
	FUEL TYPE	BATTERY	
	MAX SPEED ON LOW STATION	6 mi/hr	10 km/hr
	MAX SPEED ON HIGH STATION	10 mi/hr	18 km/hr
	WHEEL QUANTITY	F/R	2/2
	TOWING CAPACITY	8500 lbs	4 T
	DIMENSION	OVERALL SIZE	11'4" x 6.8 ft
WHEEL BASE		4.4 ft	1330 mm
WHEEL TREAD		2.7 ft	840 mm
BUCKET WIDTH		3.4 ft	1040 mm
MAX. STEERING ANGLE			35°
MINI. GROUND CLEARANCE		.65 ft	200
BATTERY	BATTERY MODEL	3-EVF-200	
	BATTERY TYPE	MAINTENANCE-FREE LEAD-ACID	
	BATTERY QUANTITY	5	
	BATTERY CAPACITY	12.7 Hp	9 KW
	RATED VOLTAGE	60 V	
	WORKING TIME	6h	
	CHARGE TIME	8h	
HYDRAULIC SYSTEM	ELECTRICAL SYSTEM VOLTAGE	12 V	
	POWER	4.2 Hp	3 KW
	DISPLACEMENT	.004 gal/r	16 ml/r
	ROTATING SPEED	Low 800 r/min High 2000 r/min	
STEERING SYSTEM	PRESSURE	14 mpa	
	STEERING SYSTEM	HYDRAULIC	
WALKING SYSTEM	PRESSURE	2030psi	14 mpa
	POWER FORM	ALTERNATING CURRENT	
	VOLTAGE	60 V	
	MOTOR QUANTITY	2	
	POWER	3.35 Hp	2.5*2 KW
BRAKE SYSTEM	TIRE MODEL	26x12.00-12	
	WORKING BRAKE	DRUM OIL BRAKE	
	PARKING BRAKE	DRUM HANDBRAKE	
STANDARD	QUICK CHANGE,ELECTRICAL DISPLAY,ELECTRICAL JOYSTICK		



Dimensions		
Item	US Standard	Metric
A	10' 9"	3280 mm
B	7' 2"	2185 mm
C	6' 11"	2100 mm
D	4' 7"	1400 mm
E	1' 12"	600 mm
F	4' 5"	1330 mm
G	3' 5"	1040 mm
H	35 °	35 °
I	2' 9"	840 mm
J	3' 9"	1140 mm
K	3' 7"	1090 mm
R	8' 4"	2520 mm